


Read instructions before use. There may be updated or additional information on our website.

Instructions

Tools required: 3 mm Allen key

Front of the stand indicated by sticker on stand leg. Front of stand should face front of bicycle.

1. Slightly loosen tightening knobs and spread legs of stand. Chainstay mounts should face up with narrow end facing inward (see fig. 1). Partially tighten knobs.
2. Lift rear of bicycle and align bicycle chainstays over mounts – move bike lengthways to find correct position (distance between the two chainstays varies along their length). If necessary fine tune width by sliding mount in or out (use Allen key to loosen and retighten bolt on underside of mount (see fig. 2).

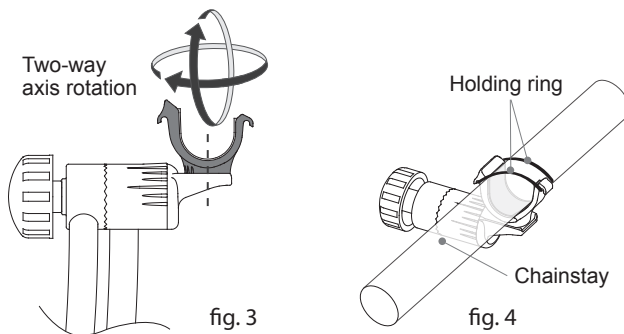

3. Adjust height of legs (rear wheel should not touch the ground and you should be able to turn pedals).
4. Adjust chainstay mounts if necessary to fine tune fit (they rotate on a two-way axis) (see fig. 3). Once fit has been achieved, tighten knobs fully.
5. If necessary, to prevent bicycle rocking or slipping, tie it down with supplied holding rings (see fig. 4). Hook one end of ring over inner lip of mount. Pull over chainstay, hook over outer lip of mount. Repeat for other chainstay.

Warning Use stand only on a flat, stable surface. The stand is designed to support a bicycle only – do not sit on bicycle while it is in the stand.